


## Schwingungsdämpfer Typ G1/GN1

### Anti-Vibration-Mounting Type G1/GN1

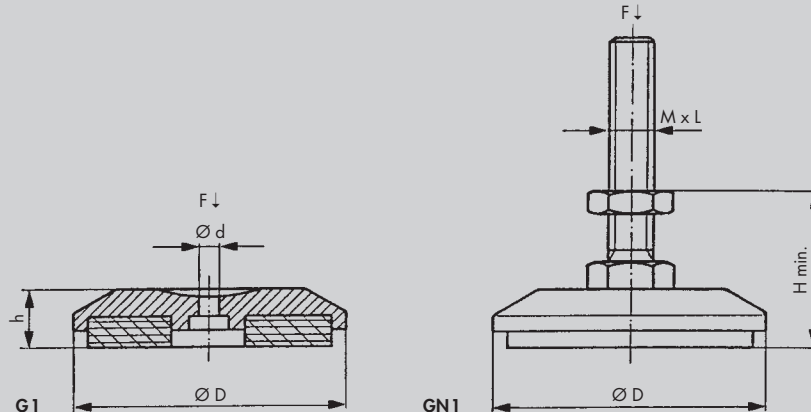

| Typ<br>Type | Art. Nr.<br>Art. no | M x L      | Ø D | Ø d | H min. | h  | F max<br>kg | Gewicht<br>Weight<br>in kg |
|-------------|---------------------|------------|-----|-----|--------|----|-------------|----------------------------|
| G1-80       | 250 100 80          | –          | 80  | 6   | –      | 18 | 250         | 0.13                       |
| G1-130      | 250 101 30          | –          | 130 | 6   | –      | 22 | 800         | 0.47                       |
| GN1-80      | 251 100 80          | M 12 x 80  | 80  | 6   | 30     | 18 | 250         | 0.21                       |
| GN1-80      | 251 100 81          | M 16 x 120 | 80  | 6   | 34     | 18 | 250         | 0.35                       |
| GN1-130     | 251 101 30          | M 20 x 120 | 130 | 6   | 43     | 22 | 800         | 0.81                       |

Die RESATEC Schwingungsdämpfer Typ G1/GN1 bestehen aus einem Aluminium-Gussdeckel mit aufgeleimter Sylomer-Körperschalldämmplatte. Das zusätzliche Nivelliersystem mit verzinkter Schraube ist mit dem Deckel verbunden und frei drehbar. Ein Gefälle von ca. 5° kann problemlos aufgenommen werden. Die Typen G1/GN1 haben eine Eigenfrequenz von 15–25 Hz im Belastungsbereich.

**Einsatzgebiet:** Schwingungs- und Körperschallisolierende Lagerung von Ventilatoren, Klimageräten, Haushaltsmaschinen, Handlunggeräten, Transportanlagen, Pumpen und dergleichen.

*The RESATEC Anti-Vibration-Mounting Type G1/GN1 is made of an aluminium cast cover with a sylomer-anti-vibration and noise limiting plate. The additional levelling system with a zinc plated bolt is connected to the cover and free turnable. The system can take up a 5° angle for base correction. The types G1/GN1 have a natural frequency of 15–25 Hz within the recommended loading range.*

**Applications:** Anti-vibration and noise dampening suspensions for ventilators, air conditioners, conveying and handling systems, household appliances, pumps, compressors etc.